

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** Ceiling Light

**Supplier's address:** Zhongshan Zhaoliang Lighting Co., Ltd., 7/F, No. 30 Qingji Street, Tiebian Village, Henglan Town, Zhongshan City, China

**Model identifier:** 30849608

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	Connection by wire		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

## Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------


### General product parameters:

Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer		17	Energy efficiency class	E
Useful luminous flux ( $\phi_{\text{use}}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)		1 910 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000 or 4 500 or 6 500
On-mode power ( $P_{\text{on}}$ ), expressed in W		17,0	Standby power ( $P_{\text{sb}}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{\text{net}}$ ) for CLS, expressed in W and rounded to the second decimal		-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, light-	Height	585	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width	100		
	Depth	50		

ing control parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,313 0,337	
<b>Parameters for LED and OLED light sources:</b>				
R9 colour rendering index value	1	Survival factor	0,90	
the lumen maintenance factor	0,96			
<b>Parameters for LED and OLED mains light sources:</b>				
displacement factor (cos $\phi_1$ )	1,00	Colour consistency in McAdam ellipses	6	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	1,0	Stroboscopic effect metric (SVM)	0,9	

(a) '-': not applicable;

(b) '-': not applicable;

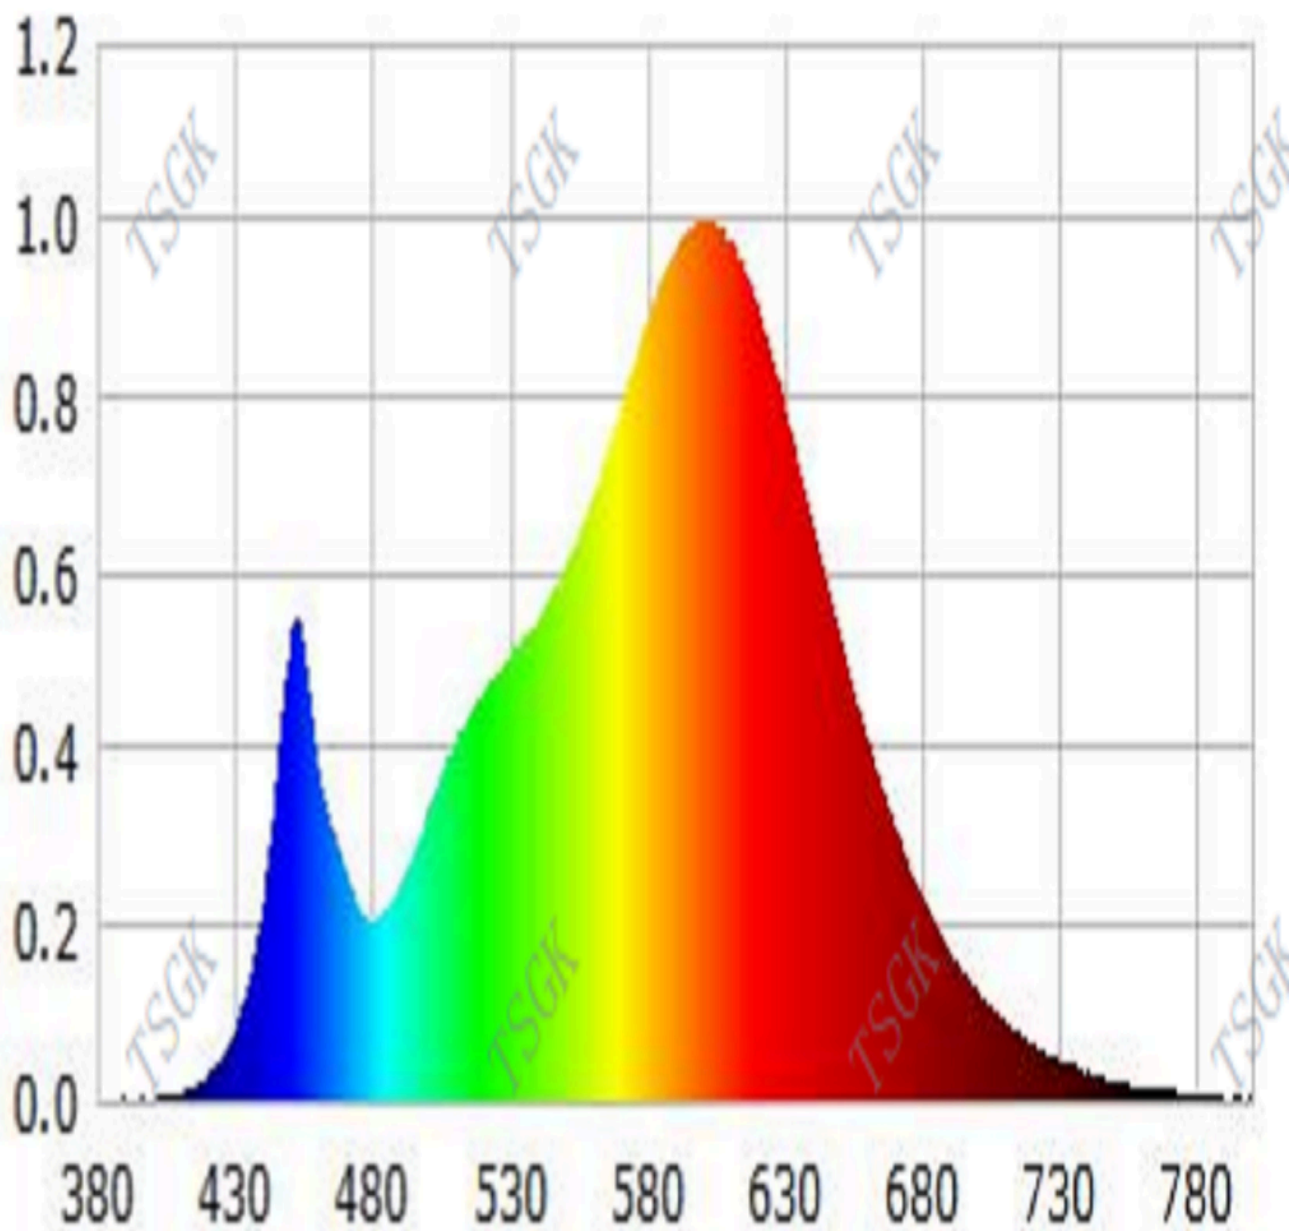

Model placed on the Union market from 11/07/2023



**EPREL registration number:** 1655622

<https://eprel.ec.europa.eu/qr/1655622>

**Supplier:** StoneX Trading (Authorised representative)

**Website:** <https://goecolighting.fr/>

**Customer care service:**

**Name:** Zhongshan Zhaoliang Lighting Co., Ltd.

**Website:**

**Email:** [goecolightingfr@163.com](mailto:goecolightingfr@163.com)

**Phone:** +447845991423

**Address:**

7/F, No. 30 Qingji Street, Tiebian Village, Henglan Town, Zhongshan  
City, China